


QUIK TIP™ CONSUMABLES

American Torch Tip is now manufacturing consumables suitable to function with Bernard® Quik Tip™ style MIG welding consumables.

Get the Made in USA quality you need with a lower cost your bottom line will appreciate!

MIG

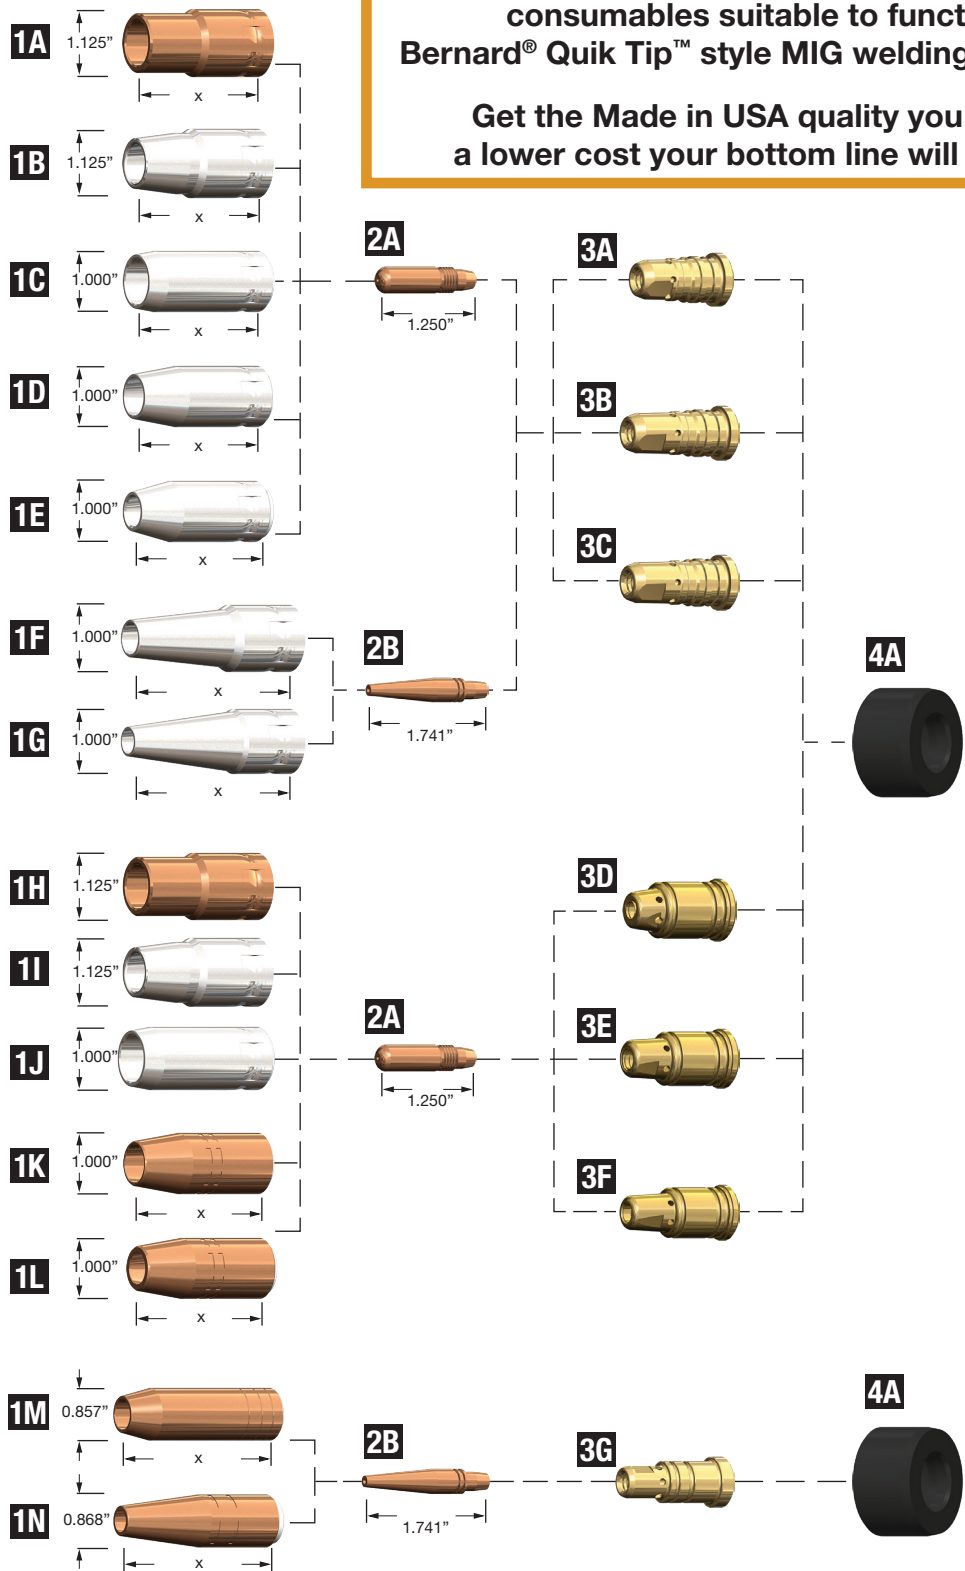

PHD™, PHDX™, Lightning®, Waltec™, Integra™, Lasertec® Laser Division of American Torch Tip®, Multi-Use™ and ProMix™ are trademarks owned by American Torch Tip Company. American Torch Tip Company is in no way affiliated with the above-named original equipment manufacturer(s). References to the above-named machines, torches, and numbers are for your reference only. Most parts advertised for sale are made by or for American Torch Tip, and other parts as indicated, are original parts manufactured by above-named, original equipment manufacturer (OEM) and are simply being re-sold by American Torch Tip. Footnotes: * = OEM; # = American Torch Tip is licensed to make and sell this part by named manufacturer; ATTC and ATT suffix = This part is an original American Torch Tip design and is not manufactured identical to the OEM design; © indicates a registered trademark, trade name, or product name of the above-named company. © Copyright 2023, American Torch Tip Company

QUIK TIP™ CONSUMABLES
1. NOZZLES

		I.D. LENGTH	
A	N1C34HQ	Nozzle Plated Copper	HD 3/4" 2.351"
B	N1C58HQ	Nozzle Plated Copper	HD 5/8" 2.327"
C	N1C34Q	Nozzle Plated Copper	3/4" 2.335"
	N1B34Q	Nozzle Brass	3/4" 2.335"
D	N1C58Q	Nozzle Plated Copper	5/8" 2.335"
	N1B58Q	Nozzle Brass	5/8" 2.335"
E	N1C12Q	Nozzle Plated Copper	1/2" 2.349"
F	N2C12HQ	Nozzle Plated Copper	1/2" 2.865"
G	N2C38HQ	Nozzle Plated Copper	3/8" 2.865"
H	N1C34HD	Nozzle Plated Copper	HD 3/4"
I	N1C58HD	Nozzle Plated Copper	HD 5/8"
J	N1C34	Nozzle Copper	3/4"
K	N1C58	Nozzle Copper	3/4" 2.335"
L	N1C12	Nozzle Copper	1/2" 2.335"
M	N2C12	Nozzle Copper	1/2" 2.865"
N	N2C38	Nozzle Copper	3/4" 2.795"

2. CONTACT TIPS
O.D.
Series 1 Contact Tips

A	T1023	Contact Tip 0.023"	(0.6 mm)	0.310"
	T1030	Contact Tip 0.030"	(0.8 mm)	0.310"
	T1035	Contact Tip 0.035"	(0.8 mm)	0.310"
	T1039	Contact Tip 0.039"	(1.0 mm)	0.310"
	T1045	Contact Tip 0.045"	(1.2 mm)	0.310"
	T1364	Contact Tip 3/64"	(1.2 mm)	0.310"
	T1052	Contact Tip 0.052"	(1.4 mm)	0.310"
	T1116	Contact Tip 1/16"	(1.6 mm)	0.310"
	T1068	Contact Tip 0.068"	(1.7 mm)	0.310"
	T1072	Contact Tip 0.072"	(1.8 mm)	0.310"
	T1564	Contact Tip 5/64"	(2.0 mm)	0.310"
	T1332	Contact Tip 3/32"	(2.4 mm)	0.350"
	T1764	Contact Tip 7/64"	(2.8 mm)	0.350"
	T1118	Contact Tip 1/8"	(3.2 mm)	0.350"

Series 2 Contact Tips Taper

B	T2023	Contact Tip 0.023"	Tapered	(0.6 mm) 0.310"
	T2030	Contact Tip 0.030"	Tapered	(0.8 mm) 0.310"
	T2035	Contact Tip 0.035"	Tapered	(0.9 mm) 0.310"
	T2045	Contact Tip 0.045"	Tapered	(1.2 mm) 0.310"
	T2364	Contact Tip 3/64"	Tapered	(1.2 mm) 0.310"
	T2052	Contact Tip 0.052"	Tapered	(1.4 mm) 0.310"
	T2116	Contact Tip 1/16"	Tapered	(1.6 mm) 0.310"

Available in packages of 25 contact tips

3. DIFFUSERS

A	D114Q	1/4" Recess	Threaded
B	D118Q	1/8" Recess	Threaded
C	D1FQ	1/8" Recess	Threaded
D	D114	1/4" Recess	Slip-On
E	D118	1/8" Recess	Slip-On
F	D1F	Flush	Slip-On
G	D218	1/8" Recess	Slip-On

4. INSULATORS

A	4423R	Insulator	Rubber
---	-------	-----------	--------

MIG