


BERNARD[®] STYLE

COMPATIBLE WITH QUIK TIP[™]†

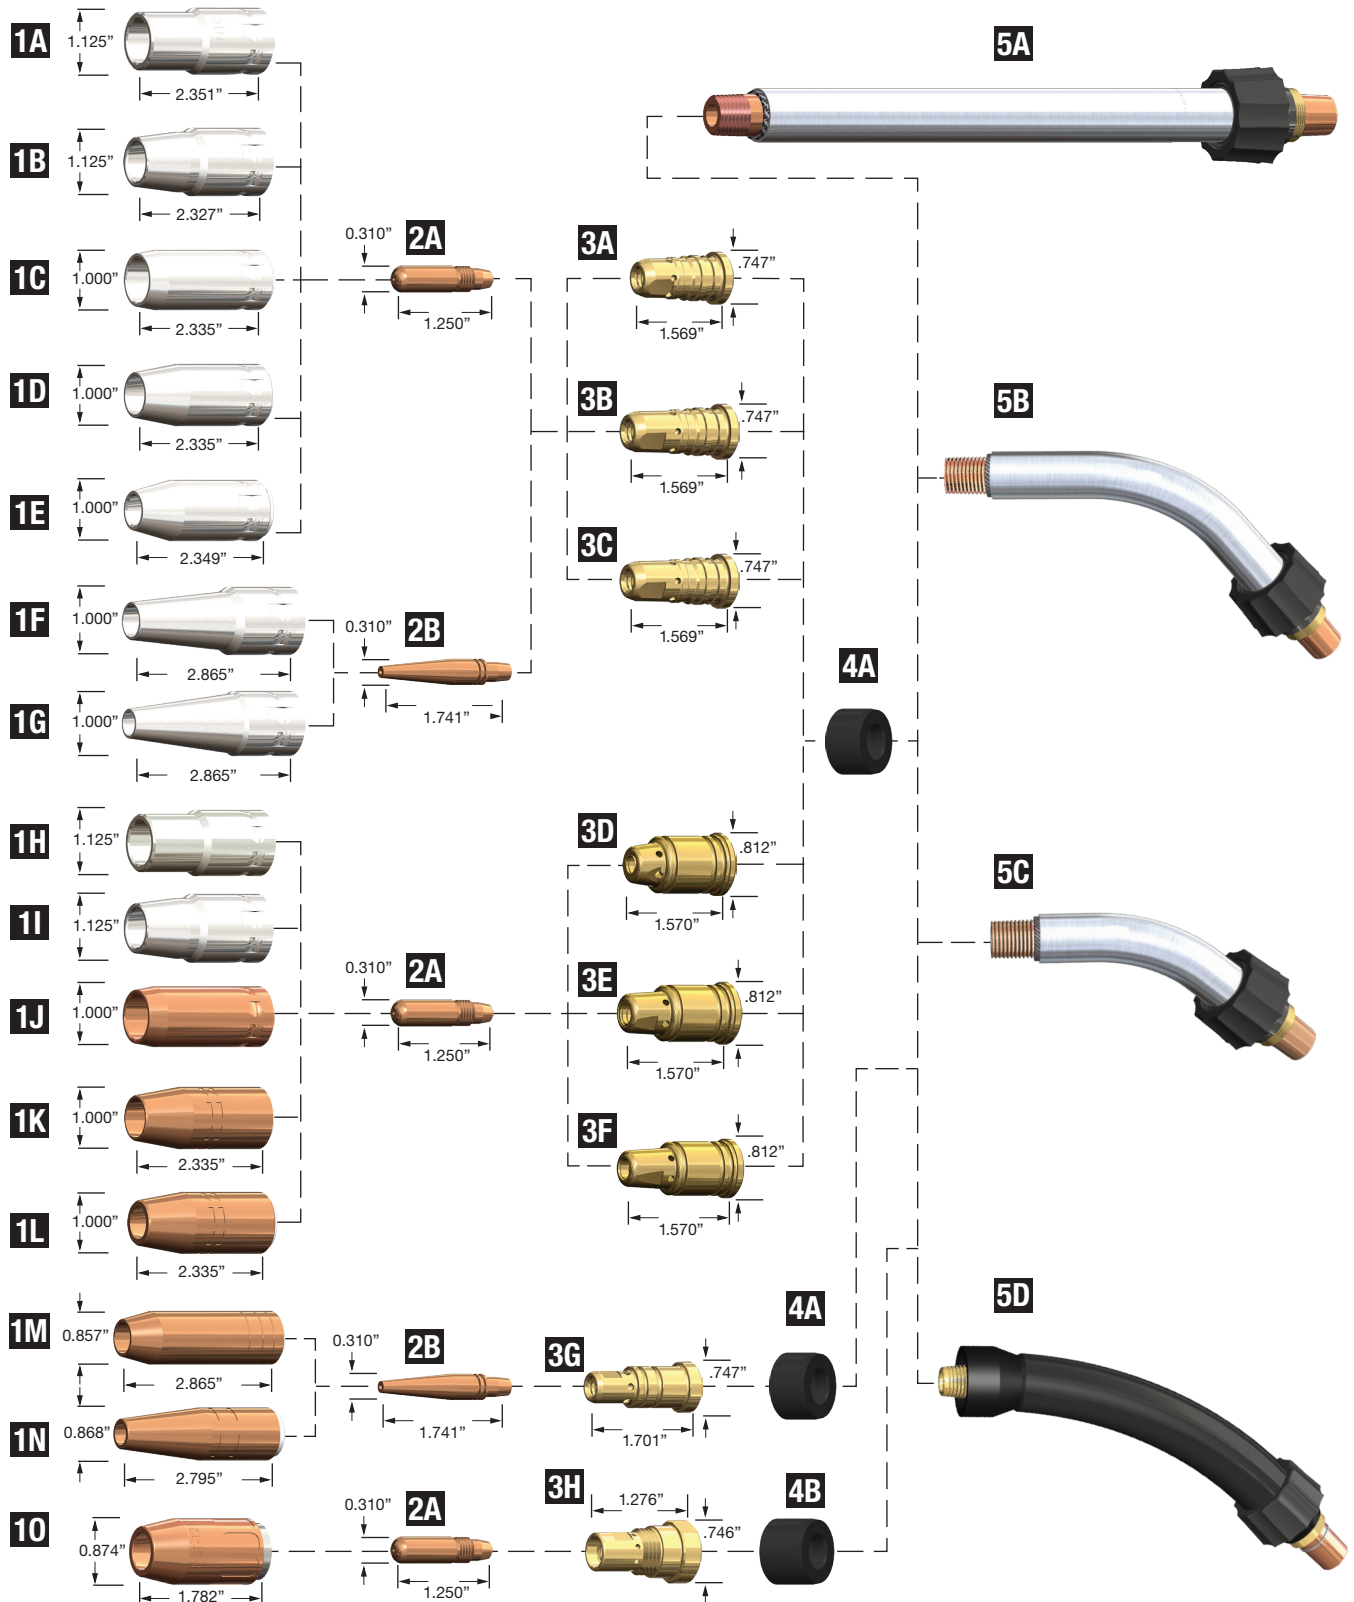

1. NOZZLES

I.D. LENGTH

A	N1C34HQ	Nozzle Plated Copper	HD	3/4"	2.351"
B	N1C58HQ	Nozzle Plated Copper	HD	5/8"	2.327"
C	N1C34Q	Nozzle Plated Copper		3/4"	2.335"
	N1B34Q	Nozzle Brass		3/4"	2.335"
D	N1C58Q	Nozzle Plated Copper		5/8"	2.335"
	N1B58Q	Nozzle Brass		5/8"	2.335"
E	N1C12Q	Nozzle Plated Copper		1/2"	2.349"
F	N2C12HQ	Nozzle Plated Copper		1/2"	2.865"
G	N2C38HQ	Nozzle Plated Copper		3/8"	2.865"
H	N1C34HD	Nozzle Plated Copper	HD	3/4"	
I	N1C58HD	Nozzle Plated Copper	HD	5/8"	
J	N1C34	Nozzle Copper		3/4"	
K	N1C58	Nozzle Copper		3/4"	2.335"
L	N1C12	Nozzle Copper		1/2"	2.335"
M	N2C12	Nozzle Copper		1/2"	2.865"
N	N2C38	Nozzle Copper		3/4"	2.795"
O	NSQT-1200	Nozzle Copper, Flush		1/2"	
	NSQT-1218	Nozzle Copper 1/8" Recess		1/2"	

2. CONTACT TIPS

O.D.

Series 1 Contact Tips

A	T1023	Contact Tip 0.023"	(0.6 mm)	0.312"
	T1030	Contact Tip 0.030"	(0.8 mm)	0.312"
	T1035	Contact Tip 0.035"	(0.8 mm)	0.312"
	T1039	Contact Tip 0.039"	(1.0 mm)	0.312"
	T1045	Contact Tip 0.045"	(1.2 mm)	0.312"
	T1364	Contact Tip 3/64"	(1.2 mm)	0.312"
	T1052	Contact Tip 0.052"	(1.4 mm)	0.312"
	T1116	Contact Tip 1/16"	(1.6 mm)	0.312"
	T1068	Contact Tip 0.068"	(1.7 mm)	0.312"
	T1072	Contact Tip 0.072"	(1.8 mm)	0.312"
	T1564	Contact Tip 5/64"	(2.0 mm)	0.312"
	T1332	Contact Tip 3/32"	(2.4 mm)	0.312"
	T1764	Contact Tip 7/64"	(2.8 mm)	0.312"
	T1118	Contact Tip 1/8"	(3.2 mm)	0.312"

Series 2 Contact Tips Taper

B	T2023	Contact Tip 0.023"	Tapered (0.6 mm)	0.312"
	T2030	Contact Tip 0.030"	Tapered (0.8 mm)	0.312"
	T2035	Contact Tip 0.035"	Tapered (0.9 mm)	0.312"
	T2045	Contact Tip 0.045"	Tapered (1.2 mm)	0.312"
	T2364	Contact Tip 3/64"	Tapered (1.2 mm)	0.312"
	T2052	Contact Tip 0.052"	Tapered (1.4 mm)	0.312"
	T2116	Contact Tip 1/16"	Tapered (1.6 mm)	0.312"

Available in packages of 25 contact tips

3. DIFFUSERS

A	D114Q	1/4" Recess	Threaded
B	D118Q	1/8" Recess	Threaded
C	D1FQ	1/8" Recess	Threaded
D	D114	1/4" Recess	Slip-On
E	D118	1/8" Recess	Slip-On
F	D1F	Flush	Slip-On
G	D218	1/8" Recess	Slip-On
H	DS-QT	Flush	Threaded

4. INSULATORS

A	4423R	Insulator	Rubber
B	4523R	Insulator	Rubber

5. GOOSENECKS

A	QT-180-12	Gooseneck	180°	12"
	QT-180-24	Gooseneck	180°	24"
	QT-180-7	Gooseneck	180°	7"
B	QT2-60	Gooseneck	60°	
	QT3-60	Gooseneck	60°	
C	QT2-45	Gooseneck	45°	
	QT2-45-12	Gooseneck	45°	12"
	QT2-45-24	Gooseneck	45°	24"
	QT3-45	Gooseneck	45°	
D	QT-F-8	Flexneck	8"	Flex Neck
	QT-F-6	Flexneck	6"	Flex Neck

6. LINERS

WIRE SIZE

LENGTH

L1A-15	0.023"-0.030"	15'
L1A-25	0.023"-0.030"	25'
L2A-15	0.030"-0.035"	15'
L2A-25	0.030"-0.035"	25'
L3A-15	0.035"-0.045"	15'
L3A-25	0.035"-0.045"	25'
L4A-15	0.045"-1/16"	15'
L4A-25	0.045"-1/16"	25'
L6A-15	5/64"	15'
L6A-25	5/64"	25'
L7A-15	3/32"	15'
L7A-25	3/32"	25'

6



AVAILABLE - NOT SHOWN

QT5-30 Gooseneck 30°